


BATTERY VDC	12-48V 72V
FUSE VDC RATING	60V 100V

ANN250	ANN400
AXE-300	AXE-450
AXE-400	AXE-650

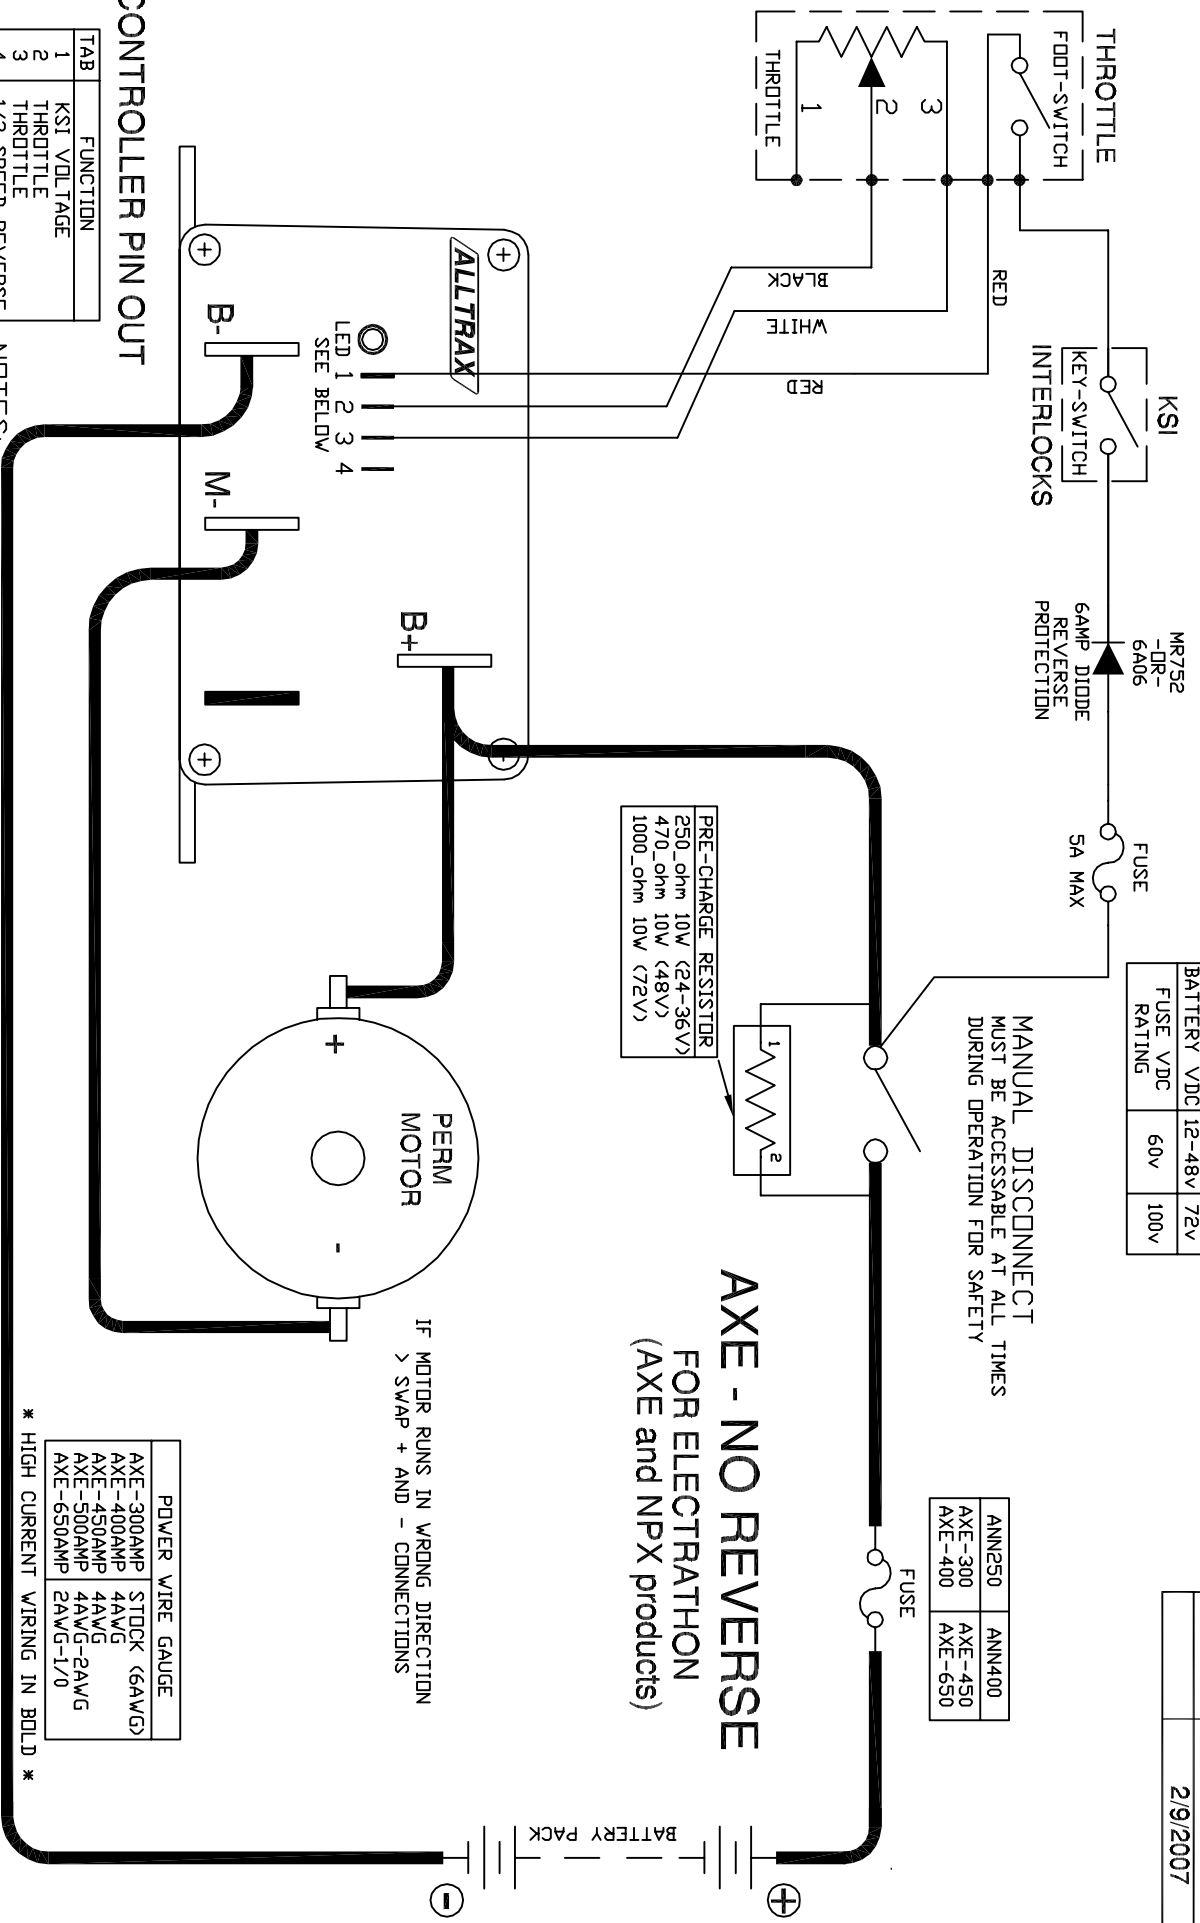

**CONTROLLER PIN OUT**

TAB	FUNCTION
1	KSI VOLTAGE
2	THROTTLE
3	THROTTLE
4	1/2 SPEED REVERSE

**NOTES:**

- \* FUSES REQUIRED FOR ALL INSTALLATIONS
- \* DIODE REQUIRED ACROSS COILS / RELAYS
- \* PRE-CHARGE RESISTOR REQUIRED
- > ASSUMES FOOTSWITCH IS OPEN WHEN THROTTLE OFF WITHOUT NOTICE
- > ALLTRAX RESERVES THE RIGHT TO CHANGE DOCUMENTATION
- > ALLTRAX MAKES NO WARRANTY AS TO THE ACCURACY, SUFFICIENCY, OR SUITABILITY OF ANY TECHNICAL OR OTHER INFORMATION PROVIDED
- > SEE OPERATORS MANUAL FOR MORE INFORMATION

DO NOT SCALE DRAWING

REVISIONS		
REV.	ECO.	DATE
A	020907	020907

DWG SCALE: NTS	DWG NO: 020907
DRWNR: R CSUK	ENGR: R CSUK
DATE: 020907	RC: RC

PROPRIETARY  
THIS DESIGN IS THE PROPERTY OF ALLTRAX INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF ALLTRAX INC.

**ALLTRAX** 1111 Cheney Creek Rd.  
Greent's Pass, OR 97527  
PHONE:(541) 476-3565

TITLE: AXE - ELECTRATHON  
Wiring Diagram

SIZE: DOCUMENT NO. Doc100-064

REV. A

FILE: .DWG-AXE-Electathon -No-Reverse-Mto-Diag SHEET 1 of 1